



EVER THETA C

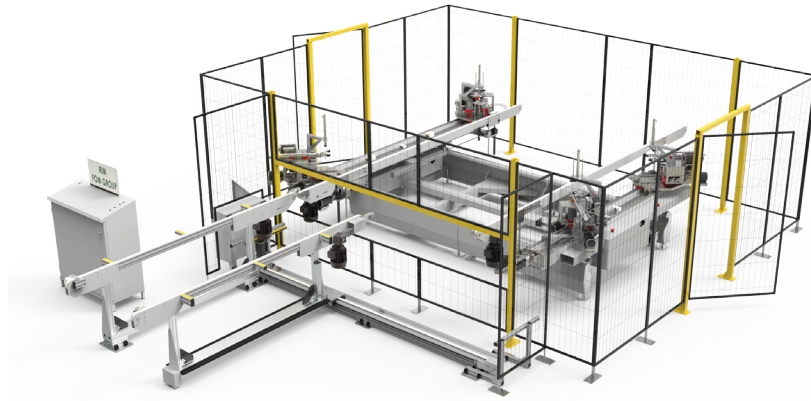

✓ = standard ○ = optional

TECHNICAL FEATURES

4-HEAD AXIS CRIMPING MACHINE WITH CONTROLLED TOOL POSITIONING AND AUTOMATIC LOADING/UNLOADING TABLE

• Automatic crimping	✓
• Tool positioning using controlled axes	✓
• No. controlled axes	22
• Blade thickness	3 mm
• Maximum crimping height (higher on request)	160 mm
• Minimum size of frame	400 x 400 mm
• Maximum size of frame (according to the version)	from 2600 x 1100 to 2600 x 5600
• Electronic adjustment and management via touch-screen panel	✓
• Safety fence with gates and safety photocells	✓
• Loading/unloading table with controlled positioning	✓
• Ability to crimp 4 or 2 corners at a time (e.g. doors with threshold)	○
• Barcode reader	○
• Able to crimp heights of up to 260 mm	○