



# LT 500

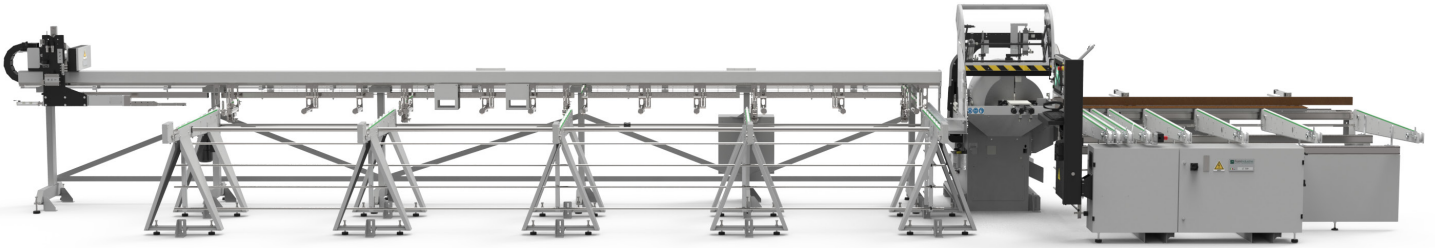

✓ = standard    ○ = optional



## TECHNICAL FEATURES

### LOADING MAGAZINE

- Minimum transportable profile length
- Maximum transportable profile length
- Loading capacity

1000 mm  
7000 mm  
13 bars

### BAR FEEDER AND PROFILE PICK-UP SYSTEM

- Miniaturised gripper
- Automatic controlled positioning on 3 axes
- Maximum speed in rapid mode

✓  
✓  
150 m/min

### CUTTING UNIT

- Tungsten carbide saw blade Ø 500
- Front cut
- Bar passage (Y; Z)
- Blade angle control with intermediate degrees of from 30° to 150°
- 2 horizontal vices
- 2 vertical vices
- Oleo-pneumatic saw blade advance
- Motor 2,2 kW
- Automatic adjustment of blade lead-out depth
- Minimum quantity lubrication (MQL) with pure oil

✓  
✓  
150 mm x 200 mm  
✓  
✓  
✓  
✓  
✓  
✓  
✓


### UNLOADING

- can be selected from following versions: Unloading roller table or Plane Out


- Minimum unloadable bar length
- Maximum unloadable length
- Useful depth of storage
- Complete storage unit using a micro
- Profile anti-drop safety device using a micro
- Label printer

150 mm  
3800 mm  
2000 mm  
✓  
✓  
✓

# LT 500

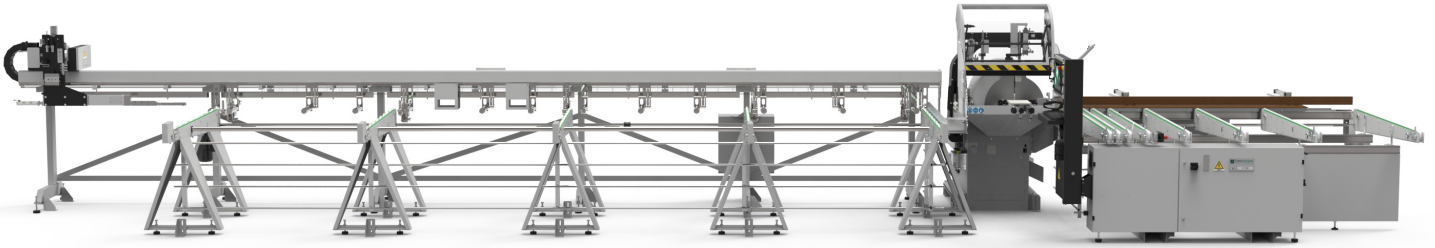

✓ = standard    ○ = optional



## TECHNICAL FEATURES

### SYSTEM OPTIONALS

- Overturning units



### CONTROL AND SOFTWARE

- FST LINE 4.0 version
- 17" display



■ 20°    ■ 45°    ■ 90°

