



BLITZ FW

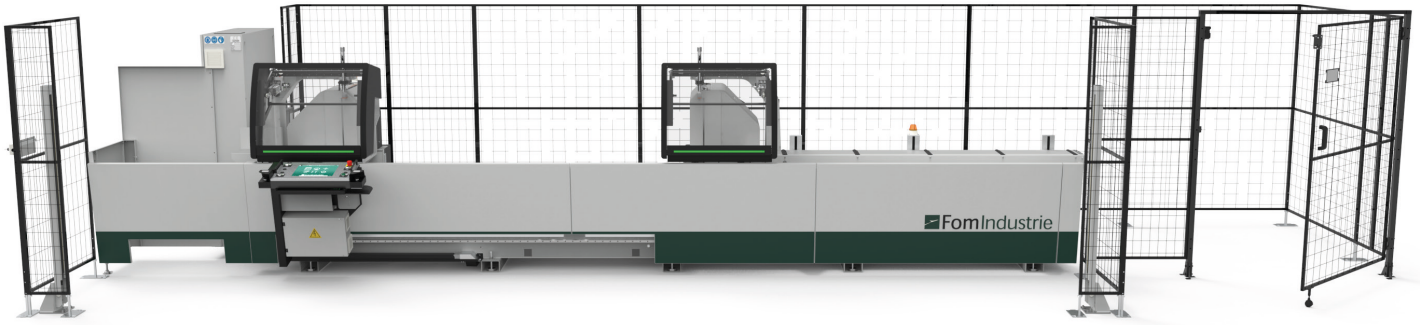


✓ = standard ○ = optional




TECHNICAL FEATURES

• Tungsten carbide blade	Ø 650mm - Ø 600mm - Ø 550mm - Ø 500mm
• Tilting of heads around the horizontal axis	from 10° to 135° (BL50 FW)
	from 12° to 135° (BL55 FW)
	from 20° to 135° (BL60 FW)
	from 20° to 135° (BL65 FW)
• Mobile head moves on straight guides	✓
• Maximum cutting capacity	5 or 6,6 m according to the version
• Minimum cutting capacity	350 mm (can be decreased with dedicated sw)
• Mobile head roller table 2500 mm	✓
• Blade motors	5,5 kW (BL65 FW); 2,2 kW
• Blade exit position transducer	○
• Machine state indicator LEDs	✓
• Horizontal vices with patented pusher system	4
• Vertical vices internal side of blade	2
• Retractable pneumatic intermediate profile support	1 ✓ + 2 ○
• Electronic profile height measuring device	○
• Automatic step by step cut for parallel cuts	✓
• Automatic step by step cut for variable angles	○
• Oversize cuts	○
• Full protective casing	○
• Conveyor belt for swarf evacuation	○
• Wireless barcode/QR code reader	○
• Label printer	○
• 15" touch screen monitor	○
• FSTCUT 4	✓
• Remote assistance for the first 12 months	✓

BLITZ FW

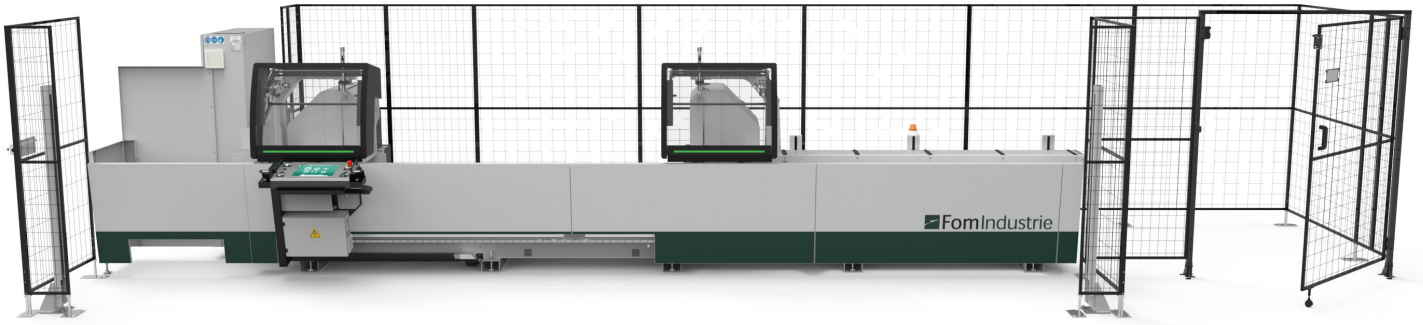


✓ = standard ○ = optional




TECHNICAL FEATURES

Cutting capacity with tilting of heads compared to the horizontal axis


BLITZ 65

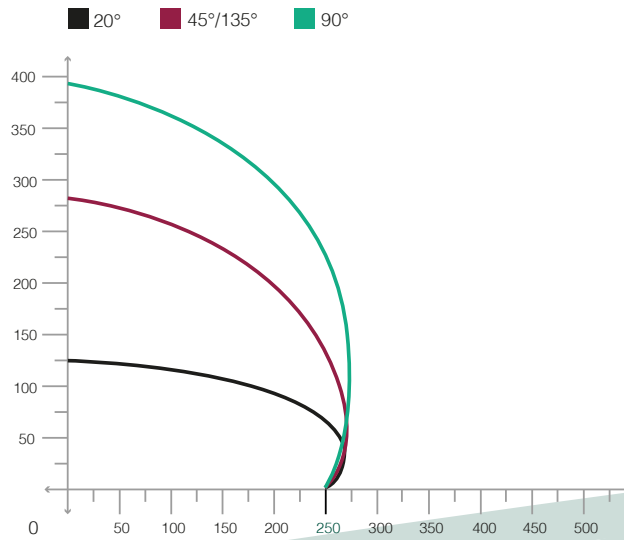

BLITZ 60

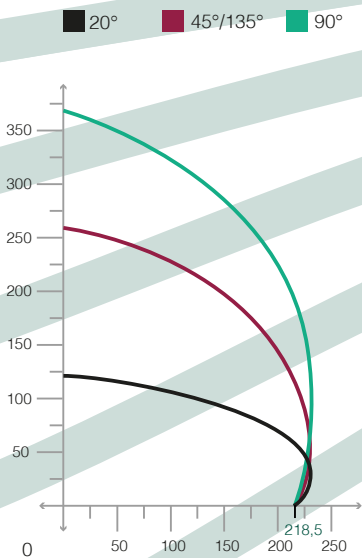

BLITZ 55

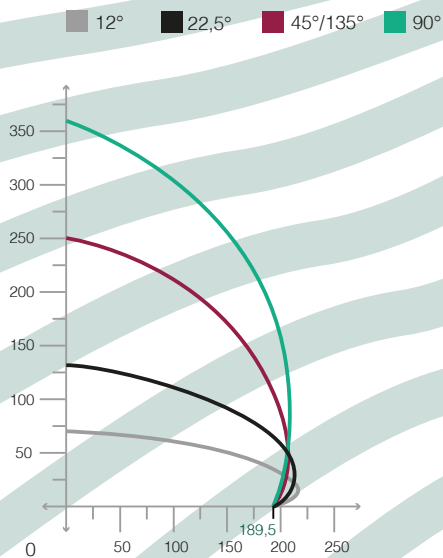

BLITZ 50

