


- Minimum cutting capacity
 Mobile head roller table 2400 mm
 Blade motors
 Minimum lubrication with pure oil
 Horizontal vices
 Vertical vices internal side of blade
 Retractable pneumatic intermediate profile support (max 3)
 Electronic profile height measuring device
- Conveyor belt for swarf evacuation
 Label printer
 5.9" display
 MICROVISION SMART Industrial Numerical Control



Cutting capacity with tilting of heads compared to the horizontal axis

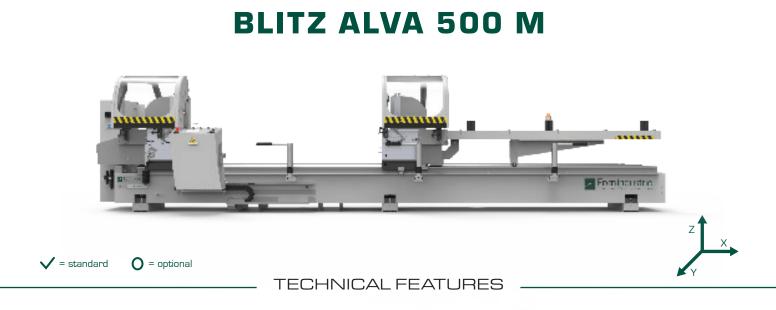