



BLITZ ALVA 500

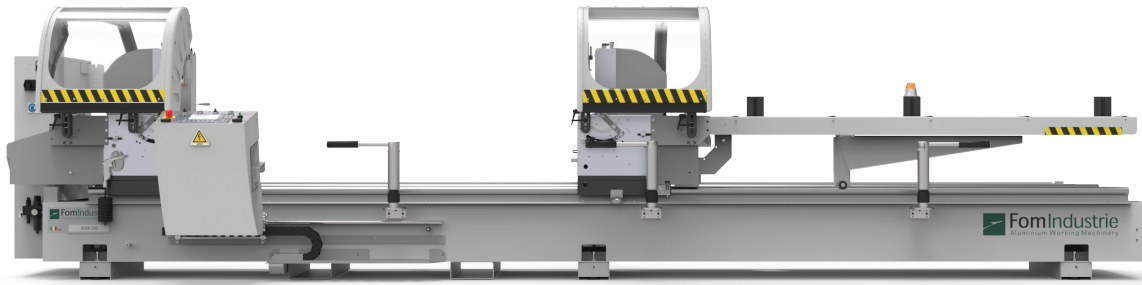


✓ = standard ○ = optional

TECHNICAL FEATURES


• Tungsten carbide blade	Ø 500
• Tilting of heads around the horizontal axis	90°- 45°- 22,5° and intermediate angles achieved by stops at the front of the machine, protected against chips
• Maximum cutting capacity	4, 5 o 6 m according to the version
• Minimum cutting capacity	305 mm (can be decreased with dedicated sw)
• Mobile head roller table 2400 mm	✓
• Blade motors	2,2 kW
• Head tilting angle indicators	○
• Minimum lubrication with pure oil	○
• Horizontal vices	3
• Vertical vices internal side of blade	2
• Retractable pneumatic intermediate profile support (max 3)	1 ✓ + 2 ○
• Electronic profile height measuring device	✓
• Step by step cut	○
• Oversize cuts	○
• Conveyor belt for swarf evacuation	○
• Label printer	○
• 6.5" colour graphic display	○
• RIGHEL Industrial Numerical Control on Blitz ALVA 500 version A	✓
• GENA Industrial Numerical Control on Blitz ALVA 500 version C	✓

BLITZ ALVA 500

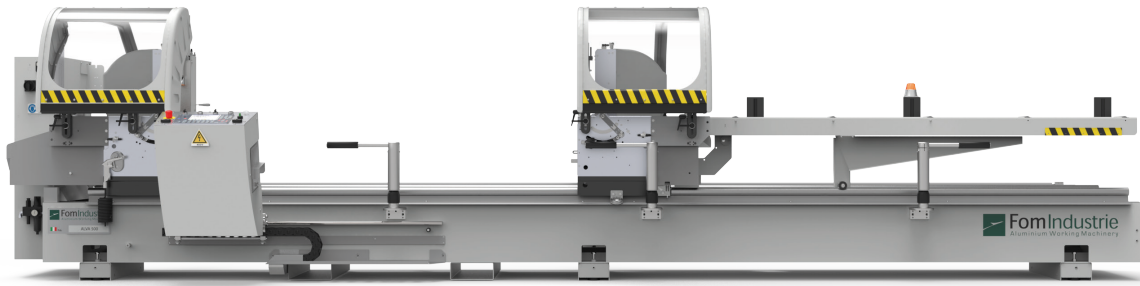

✓ = standard

○ = optional



TECHNICAL FEATURES

Cutting capacity with tilting of heads compared to the horizontal axis

