



# BLITZ ALVA 550

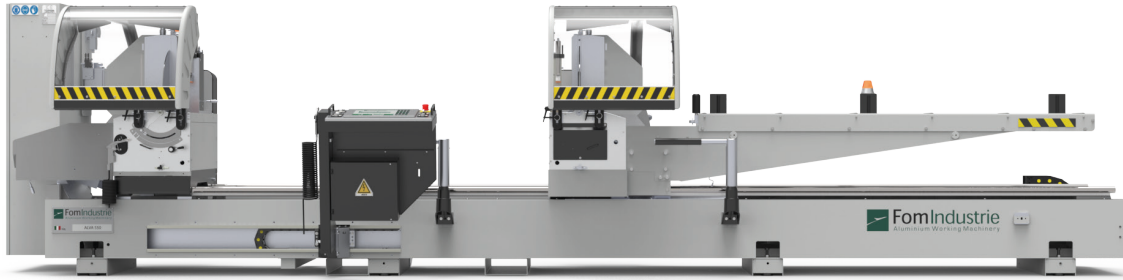


✓ = standard    ○ = optional

## TECHNICAL FEATURES


• Tungsten carbide blade	Ø 550
• Tilting of heads around the horizontal axis	90°- 45°- 22,5° and intermediate angles achieved by stops at the front of the machine, protected against chips
• Maximum cutting capacity	4, 5 o 6,6 m according to the version
• Capacità di taglio minimo	370 mm (can be decreased with dedicated sw)
• Mobile head roller table 2400 mm	✓
• Blade motors	2,2 kW
• Minimum lubrication with pure oil	○
• Horizontal vices	3
• Vertical vices internal side of blade	2
• Retractable pneumatic intermediate profile support (max 3)	○
• Electronic profile height measuring device	○
• Step by step cut	○
• Oversize cuts	○
• Conveyor belt for swarf evacuation	○
• Wireless barcode reader on Version E	○
• Label printer	○
• 15" touch screen monitor	○
• FSTCUT4 on Version E	✓
• FSTCUT4 Remote assistance for the first 12 months	✓
• SILVER Industrial Numerical Control on Version C	✓
• ALIA Industrial Numerical Control on Version A	✓

# BLITZ ALVA 550

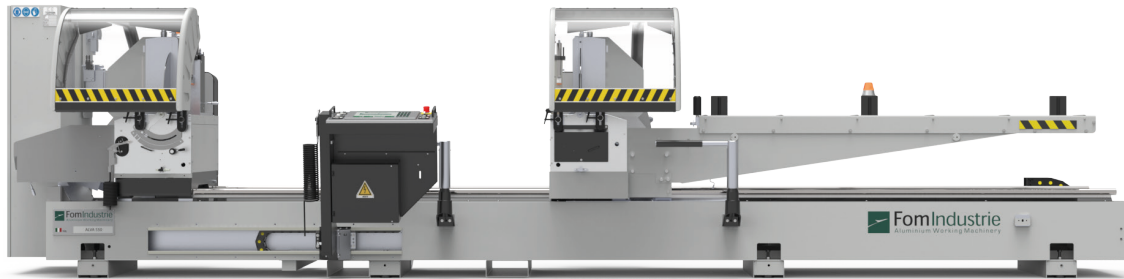

✓ = standard

○ = optional



## TECHNICAL FEATURES

### Cutting capacity with tilting of heads compared to the horizontal axis

