



KEOPE

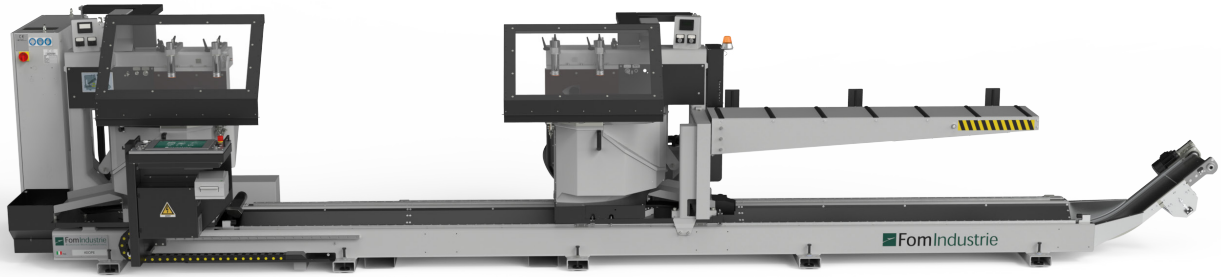

✓ = standard

○ = optional

✗ = not available

TECHNICAL FEATURES

- Tungsten carbide blades
- Rotation of head around the vertical axis
- Tilting of blade around the horizontal axis
- Manual head rotation with display
- NC managed head rotation
- NC managed blade tilting
- Pneumatic blade tilting
- Maximum cutting capacity
- Minimum cutting capacity
- Mobile head roller table 2200 mm
- Blade motors
- Vertical vices
- Retractable pneumatic intermediate profile support
- Step by step cut
- Oversize cuts
- Wireless barcode reader
- Label printer
- 15" touch screen monitor
- FSTCUT 4
- Remote assistance for the first 12 months

E5

E3

E1

Ø 600 mm

from 22,5° to 140°

from 90° to 45°

✗

✗

✓

✓

✓

✗

✓

✗

✗

✗

✓

✓

5 o 6,6 m (according to the version)

470 mm (can be decreased with dedicated sw)

○

3,7 kW

4

○

○

○

○

○


○

✓

✓

✓


KEOPE

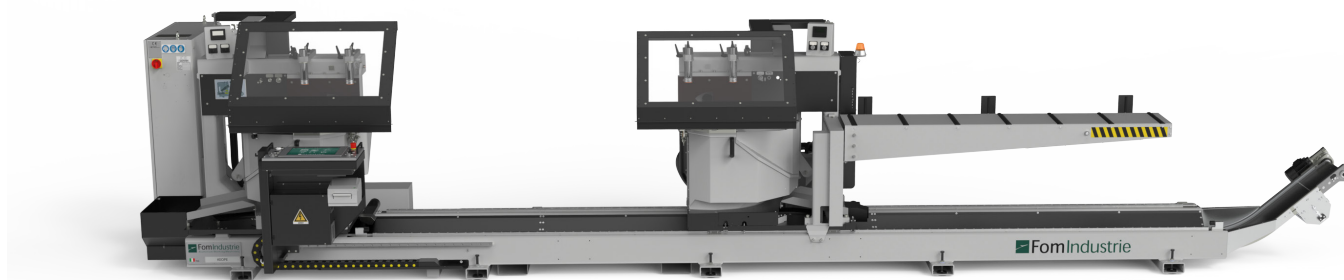

✓ = standard


○ = optional

✗ = not available



TECHNICAL FEATURES

Head rotation (vertical axis)

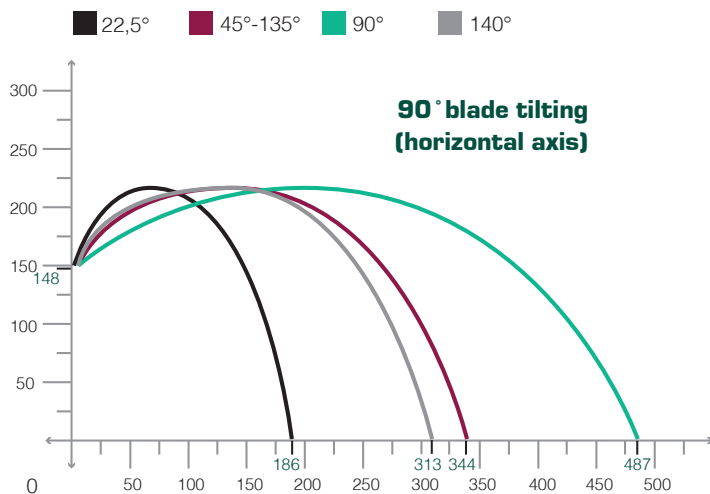

Head rotation (vertical axis)

