



LT 500

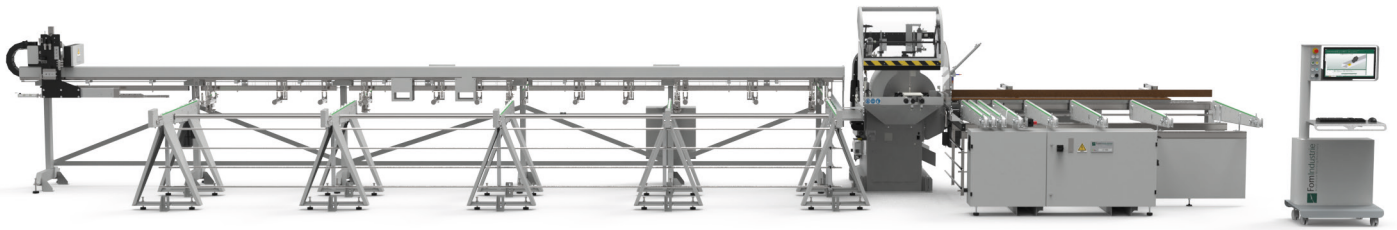

✓ = standard ○ = optional



TECHNICAL FEATURES

LOADING MAGAZINE

- Minimum transportable profile length
- Maximum transportable profile length
- Loading capacity

1000 mm
7000 mm
13 bars

BAR FEEDER AND PROFILE PICK-UP SYSTEM

- Miniaturised gripper
- Automatic controlled positioning on 3 axes
- Maximum speed in rapid mode

✓
✓
150 m/min

CUTTING UNIT

- Tungsten carbide saw blade Ø 500
- Front cut
- Bar passage (Y; Z)
- Blade angle control with intermediate degrees of from 30° to 150°
- 2 horizontal vices
- 2 vertical vices
- Oleo-pneumatic saw blade advance
- Motor 2,2 kW
- Automatic adjustment of blade lead-out depth
- Minimum quantity lubrication (MQL) with pure oil

✓
✓
150 mm x 200 mm
✓
✓
✓
✓
✓
✓
✓

UNLOADING MAGAZINE

- can be selected from following versions: Unloading roller table or Plane Out

- Transfer table in non-scratch material
- Fixed accumulation table in non-scratch material
- Unloading roller table
- Minimum unloadable bar length
- Maximum unloadable length
- Useful depth of storage
- Complete storage unit using a micro
- Profile anti-drop safety device using a micro
- Label printer

UNLOADING ROLLER TABLE

✓
✓
250 mm
4500 mm

PLANE OUT

✓
✓
70 mm
4500 mm


2000 mm

✓
✓
✓

LT 500



✓ = standard ○ = optional



TECHNICAL FEATURES

SYSTEM OPTIONALS

- Overturning units

○

CONTROL AND SOFTWARE

- FST LINE 4.0 version
- 17" display

✓
✓

■ 20° ■ 45° ■ 90°

