


Blitz 65



Double tilting head sawing machine with controlled movement of the mobile head and electronic control of the head.

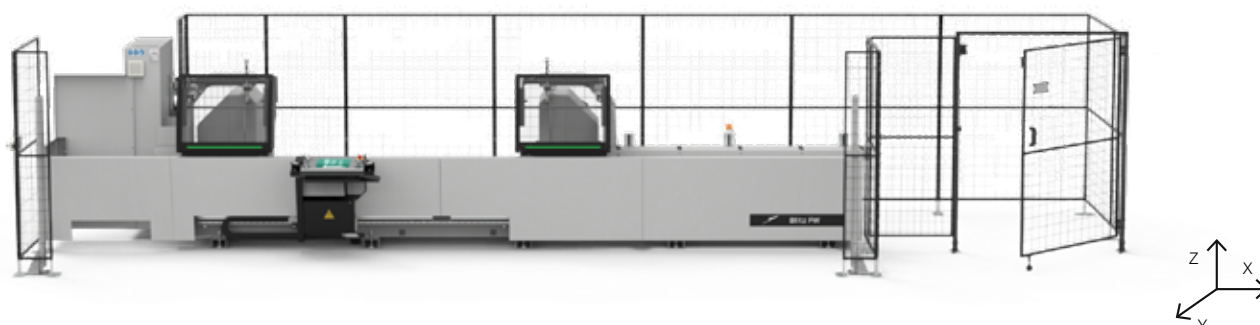

✓ = standard ○ = optional

Technical specifications

Tungsten carbide saw blade	Ø 650 mm
Tilting of the heads around the horizontal axis	from 20° to 135°
Movable head movement on linear guides	✓
Maximum cutting capacity (according to the version)	5 or 6,6 m
Minimum cutting capacity (can be reduced with dedicated software)	350 mm
2 500 mm movable head roller conveyor	✓
Blade motors	5,5 kW
Machine status indicator LEDs	✓
4 orizontal vices with patented pusher system	✓
2 vertical vices inside the blade	✓
Retractable pneumatic intermediate profile support	1 ✓ + 2 ○
Blade rotation speed adjustment	✓
Automatic adjustment of blade exit position	○ (✓ for FW versions)
Front baffles	○
Integral guard system	○
Minimum quantity lubrication (MQL) with pure oil	✓
Automatic profile height measuring device	○
Step-by-step cutting	○ (✓ for FW versions)
Oversize cutting	○
Automatic cutting (FW version only)	✓
Swarf conveyor belt	○
Wireless optical reader for barcodes and QR codes	○
Label printer	○
15" touchscreen monitor	✓
FSTCut4	✓
Remote assistance service for the first 12 months	✓



The specifications and illustrations in this document are only guideline, **Fom** therefore reserves the right to make any modifications it deems necessary for technical or commercial reasons at any time and without prior notification.

REV. 01

Blitz 65



Double tilting head sawing machine with controlled movement of the mobile head and electronic control of the head.

Cutting capacity with tilting of heads compared to the horizontal axis

