


Double head sawing machine with controlled movement of the mobile head and electronic control of the head tilting.

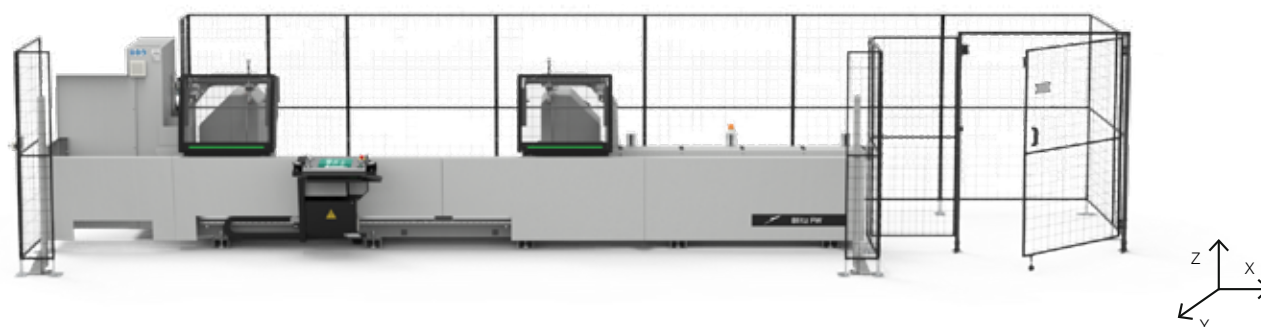

✓ = standard

○ = optional

## Technical specifications

|                                                                   |                                                                                           |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| Tungsten carbide saw blade                                        | Ø 500 mm - Ø 550 mm - Ø 600 mm                                                            |
| Tilting of the heads around the horizontal axis                   | from 10° to 135° (Blitz 50)<br>from 12° to 135° (Blitz 55)<br>from 20° to 135° (Blitz 60) |
| Movable head movement on linear guides                            | ✓                                                                                         |
| Maximum cutting capacity (according to the version)               | 5 or 6,6 m                                                                                |
| Minimum cutting capacity (can be reduced with dedicated software) | 350 mm                                                                                    |
| 2 500 mm movable head roller conveyor                             | ✓                                                                                         |
| Blade motors                                                      | 2,2 kW                                                                                    |
| Machine status indicator LEDs                                     | ✓                                                                                         |
| 4 orizontal vices with patented pusher system                     | ✓                                                                                         |
| 2 vertical vices inside the blade                                 | ✓                                                                                         |
| Retractable pneumatic intermediate profile support                | 1 ✓ + 2 ○                                                                                 |
| Blade rotation speed adjustment                                   | ✓                                                                                         |
| Automatic adjustment of blade exit position                       | ○                                                                                         |
| Front baffles                                                     | ○                                                                                         |
| Integral guard system                                             | ○                                                                                         |
| Minimum quantity lubrication (MQL) with pure oil                  | ✓                                                                                         |
| Automatic profile height measuring device                         | ○                                                                                         |
| Step-by-step cutting                                              | ○ (✓ for FW versions)                                                                     |
| Oversize cutting                                                  | ○                                                                                         |
| Swarf conveyor belt                                               | ○                                                                                         |




Double head sawing machine with controlled movement of the mobile head and electronic control of the head tilting.

## Technical specifications


|                                                   |   |
|---------------------------------------------------|---|
| Wireless optical reader for barcodes and QR codes | ○ |
| Label printer                                     | ○ |
| 15" touchscreen monitor                           | ✓ |
| FSTCut4                                           | ✓ |
| Remote assistance service for the first 12 months | ✓ |

Cutting capacity with tilting of heads compared to the horizontal axis

### Blitz 50

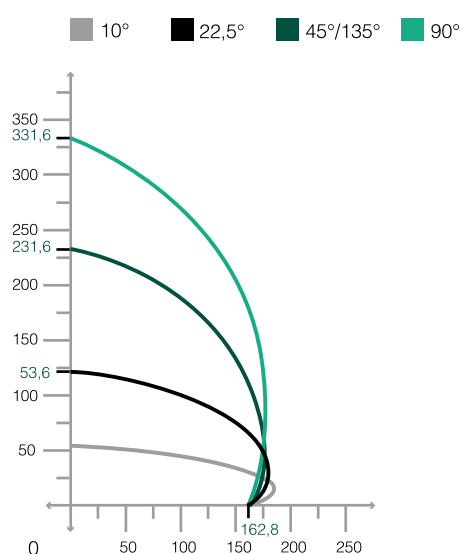

### Blitz 55

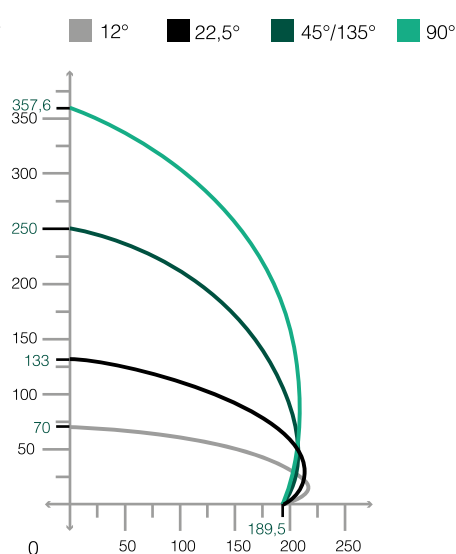

### Blitz 60

