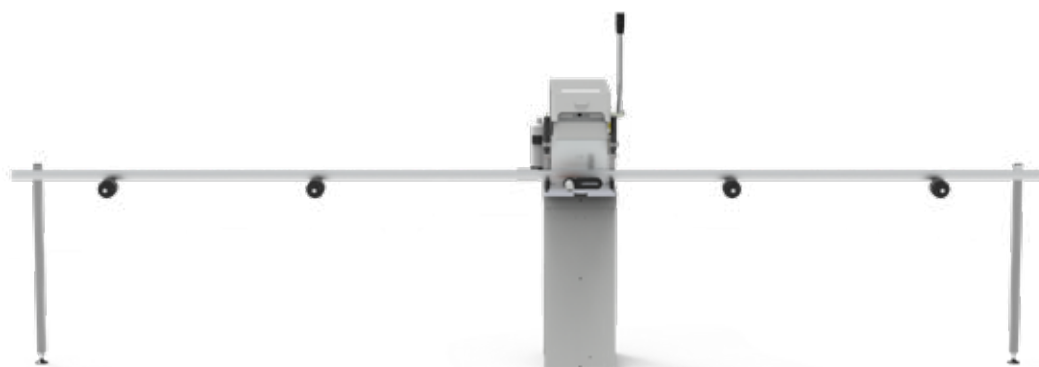



✓ = standard

○ = optional

Technical specifications


Drill bit downstroke (according to the version)	automatic or manual
Pneumatic adjustment of the drilling c/c distance with two pre-adjustable positions	✓
Quick adjustment of the drilling axis in Y with pre-adjustable, 8-position mechanical stops	✓
Drilling c/c distance	min = 25 mm - max = 180 mm
Vertical spindle stroke	80 mm
Maximum profile clamping dimensions	110 x 120 mm
2 double-diameter drill bits 6/12 mm	✓
1 horizontal vice	✓
Vice jaw extension 280 mm (RH and/or LH) with No. 1 retractable stop	○
Vice jaw 2 500 mm with No. 4 retractable stops and No. 2 profile support rollers	○
Additional retractable stop	○
Length stop	○
Minimum quantity lubrication with pure oil	○

Working capacity

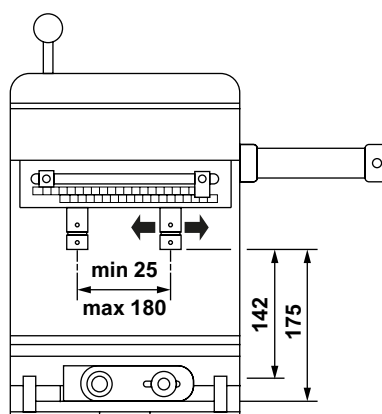

Pegaso 2

Electro-pneumatic drilling machine with two units



✓ = standard

○ = optional

Technical specifications

Automatic drill bit feed with rapid approach	✓
First and second mobile head	✓
Pneumatic adjustment of the drilling c/c distance with two pre-adjustable positions	✓
Quick adjustment of the drilling axis in Y with pre-adjustable, 8-position mechanical stops	✓
Drilling c/c distance	min = 25 mm - max = 180 mm
Vertical spindle stroke	80 mm
Maximum profile clamping dimensions	110 x 120 mm
Possibility of drilling with different drilling axis distances between the first and second heads	max 60 mm
4 double-diameter drill bits 6/12 mm	✓
2 horizontal vices	✓
Vice jaw extension 280 mm (RH and/or LH)	○
Additional retractable stop	○
Length stop	○
Minimum quantity lubrication with pure oil	○
Additional vertical drilling unit	○



Pegaso 2

Electro-pneumatic drilling machine with two units



Working capacity

