



Double head sawing machine with down-feed blades and manual tilting and rotation of the heads. Manual/controlled movement of the mobile head.

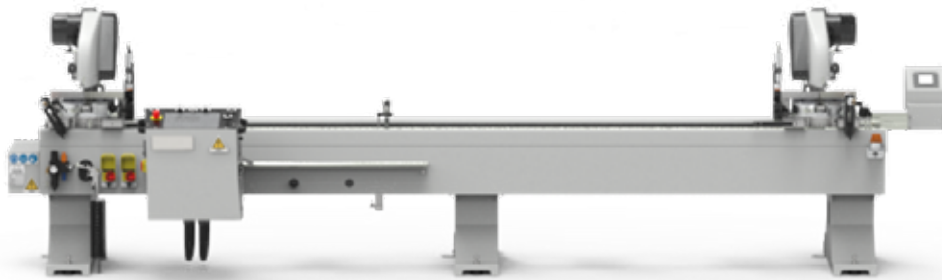

✓ = standard ○ = optional ✗ = not available

Technical specifications


	V	M
Tungsten carbide saw blades	Ø 400 mm	
Manual head rotation about the vertical axis	from 45° to 135°	
Manual blade tilting about the horizontal axis	from 90° to 45°	
Maximum cutting capacity (according to the version)	4 or 6 m	
Minimum cutting capacity	420 mm	
First fixed head, second movable head with automatic positioning	✗	✓
First fixed head, second movable head with manual positioning and digital readout	✓	✗
Blade motors	2,2 kW	
Pneumatic blade feed with hydraulic speed adjustment	✓	✓
2 horizontal vices	✓	✓
Vertical vices	○	○
Integral cutting area guard	✓	✓
Retractable intermediate profile support (pneumatic or manual)	○	○
Label printer	✗	○
5.9" display	✗	✓
Tex control unit	✗	✓



Double head sawing machine with down-feed blades and manual tilting and rotation of the heads. Manual/controlled movement of the mobile head.

Head rotation around the vertical axis

Blade inclination at 90° to the horizontal axis

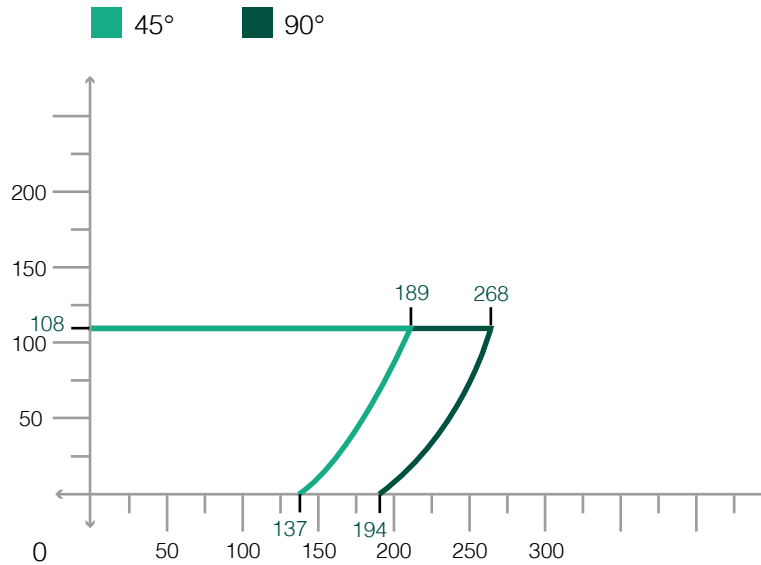

Blade inclination at 45° to the horizontal axis

